dyson airblade dB



Electrical

Input voltage/Frequency: 120-127V 50 & 60 Hz
Rated power: 1400 W
Motor type: Dyson digital motor V4 – brushless DC Motor
Motor switching rate: 6,100 per second
Motor speed: 92,000 rpm
Operating temperature range: 32°– 104°F
Heater type: None
Standby power consumption: Less than 0.5 W
Construction
Casing construction: Polycarbonate-ABS casing
Antimicrobial coating type: Antimicrobial molded additive in facia and blades
Bacterial reduction rate from external surfaces: Up to 99.9% over 24 hours
Color finish: Gray or White
Light reflective value: 28.3 (gray) 77.4 (white)
Galvanized steel back plate/mounting bracket
Exterior screw type: Anti-tamper M6 machine screw
Water ingress protection to IP35

Filter

HEPA filter (glass fiber and fleece prelayer) Bacteria removal 99.97% at 0.3 microns

Operation

Touch-free infra-red activation Hand dry time measurement: 12 seconds. (Measurement based on National Sanitation Foundation Protocol P335) Operation lock-out period: 30 seconds Airspeed at apertures: 420 mph Operating airflow: Up to 9.25 gallons/s Sound power level: 81dB(A) Logistics

Standard warranty
Unit barcode: Gray 88560900151 7; White 88560900152 4
Packaged dimensions: 28^{15}_{16} " $ imes$ $14^{1}_{\%}$ " $ imes$ 12 "
Packaged weight: 24.3 lbs
Net weight: 18.1 lbs
Single unit order code: Gray 300681-01; White 300682-01
Serial number prefix: Gray FT6; White FT7

5 year parts, 1 year labor warranty

Accreditations

Carbon Trust

HACCP International

NSF International P335



Product range

AB14 Gray

White





The Carbon Reduction Label is the registered trade mark of the Carbon Trust. HACCP International non-food certification mark is the registered trademark of HACCP International. HACCP International have certified Dyson products based on their recommended installation and operating conditions. The NSF logo is the registered trade mark of NSF International.


For further information please contact Dyson. 1-888-397-6622 www.dysonairblade.com airbladeinfo@dyson.com

dyson airblade dB

TECHNICAL SPECIFICATION



REAR ELEVATION

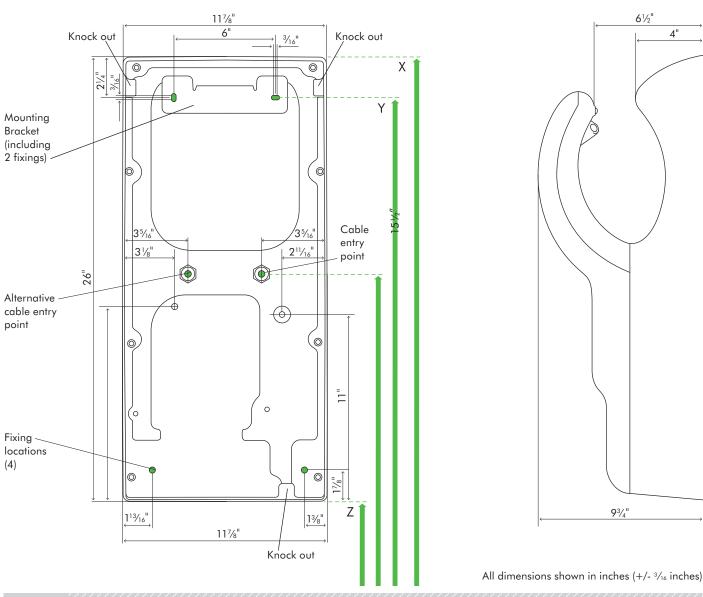

FLOOF

Recommended installation heights from floor			
Male	X 41 ³ /8"	Y 39"	Z 15 ³ /8"
Female	X 38 ³ /8"	Y 36"	Z 12 ³ /8"
Child or disabled	X 34 ¹ / ₂ "	Y 32 ¹ /8"	Z 8 ¹ /2"
Machine dimensions			
Height 26" Width 11 ⁷ /8" Depth 9 ³ /4"			

Minimum clearance

$7^{7}/8^{"}$ from floor; 2" clearance either side and above machine.			
Cable entry point from floor			
Male	281/2"		
Female	25 ⁵ /8"		
Child or disabled	215/8"		

For further information please contact Dyson.

1-888-397-6622 • www.dysonairblade.com • airbladeinfo@dyson.com



SIDE ELEVATION